


### SP-24D Double covering Machine

#### Key Features

- Machine for **Elastic Covered Yarn**: core in rubber/spandex, cover in PA, PET, Rayon, Cotton..
- Available with mechanical and electronical headstock;
- Pivoting spindles for easier usage and higher performance;

#### Machine main characteristics

Yarn counts	Spandex 11-2200 dTex Rubber 20-120 GG
Pre-draft ratio	1.3
Twist per meter range	175 - 3750 TPM
Max spindle speed	22000 rpm**
Flanged bobbin dimensions	max Ø 84mm - h 165mm
Total draft ratio	2 - 6
Overfeed %	0 - 660%
Max Take-up speed	60 m/min
Take-up package	Ø 180 mm x 150 mm
Tapering angle	0° - 50°
Crossing Angle	10° - 40°
<small>** max speed referred to bobbin max dimensions</small>	
Take-up positions per section	12
Spindle type	MTS - SGX
Spindles per section	24
Spindle gauge	220mm

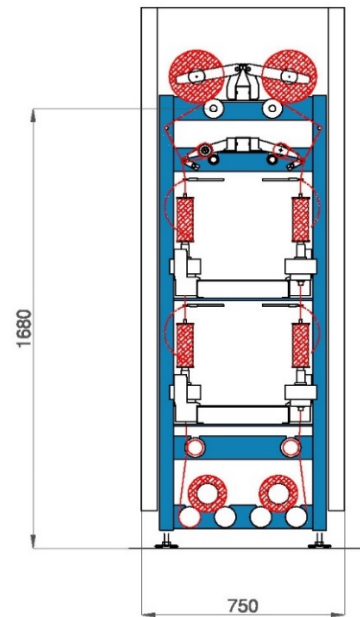

#### Optionals

- Rubber feeding system;
- Service carts for threading and doffing;

